

Gas Control Panel



Model: KB6000III

Features


- LED display
- RS485 signal input
- Auto-search after power on
- 6 passive relay output
- Intelligent system including :
 - Signal sampling, data analysis, fault detection,
 - Power management, alarm indication and external device's activation

Specifications

- Power voltage: AC220V±15%
- Power consumption: ≤15W
- Detector connected: ≤62 pcs
- Working temperature: -10℃~50℃
- Working humidity: ≤95%RH (no dews)
- Ingress protection: IP54
- Alarm method: visual and audible alarm
- Alarm sound intensity: ≥100db @ 1m
- Transmission distance: ≤1000m
- Cable required:RVVP 1.5 mm²×4 core cable
- Installation method: wall mounted
- Dimension: 390mm×280mm×116.2mm
- Weight: about 7.4kg



KB6000III Application graphic

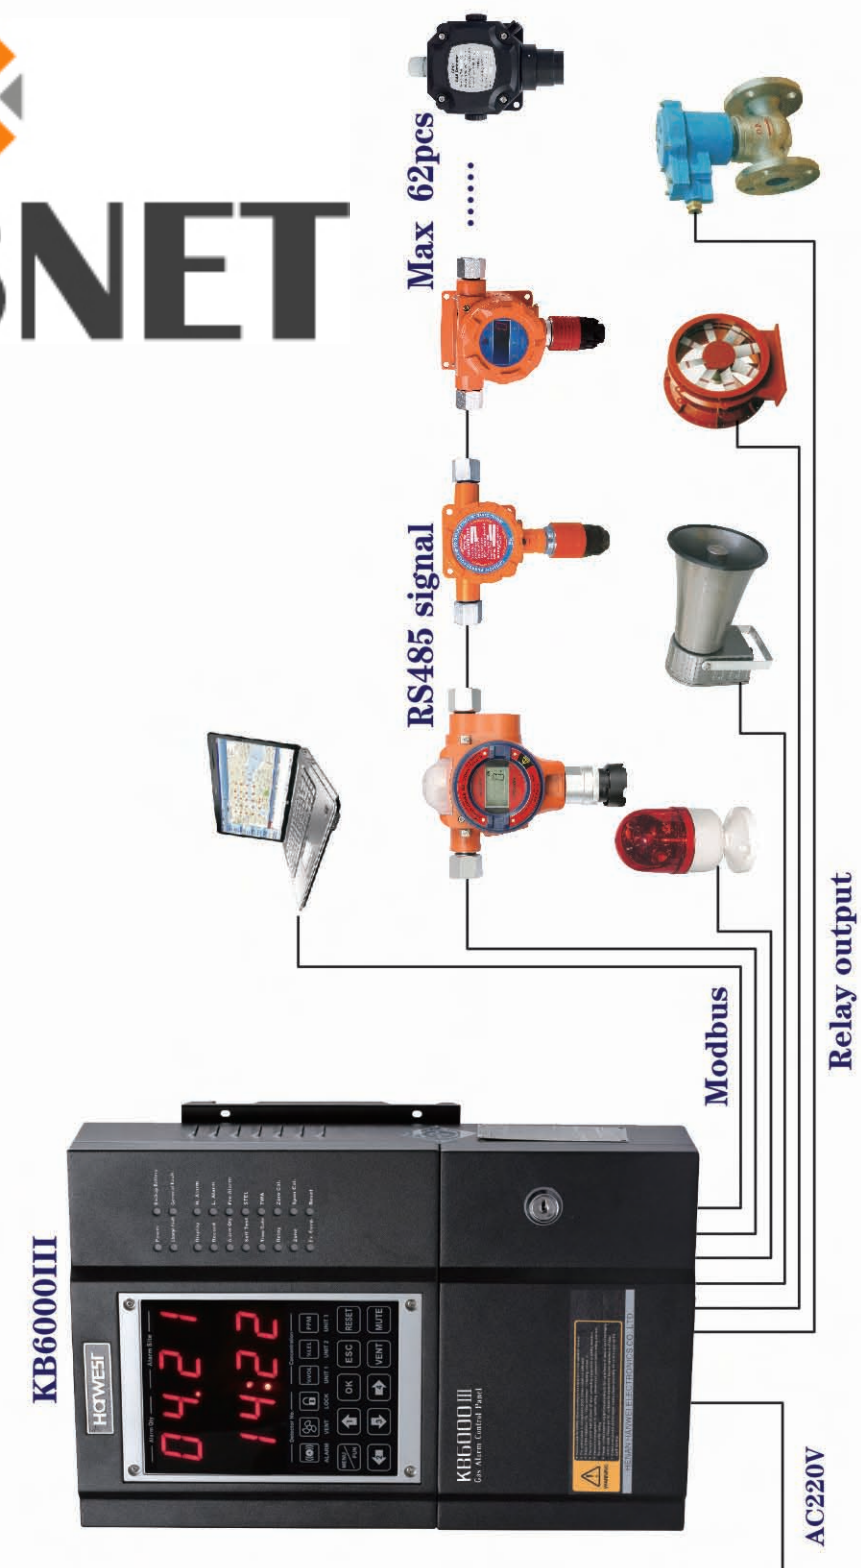

HAUSNET S.R.L.

Tel Argentina: (+54-11) 5219-2211

Tel Chile: (+56-2) 2897-3999

E-Mail: hausnet@hausnet.com.ar

Web: www.hausnet.com.ar